# Observing and Modeling the Surface Scattering Layer of First-Year Arctic Sea Ice

Richard E. Moritz Applied Physics Laboratory University of Washington Seattle, WA 98105-6698

phone: 206.543.8023 fax: 206.616.3142 email: dickm@apl.washington.edu

Bonnie Light Applied Physics Laboratory University of Washington Seattle, WA 98105-6698

phone: 206.543.9824 fax: 206.616.3142 email: bonnie@apl.washington.edu

Award Number: N00014-03-1-0120

### LONG-TERM GOALS

The long-term goal of this work is to increase the quantitative understanding of the partitioning of incident solar radiation by sea ice. The partitioning of shortwave radiation into components backscattered to the atmosphere, absorbed by the ice, and transmitted to the ocean is central to icealbedo feedback, the mean annual cycle of ice thickness, mechanical and biological properties of the ice, and the qualitative and quantitative properties of light fields available to under-ice biological communities. This partitioning is known to depend strongly on the physical properties of the ice cover, including ice concentration, snow cover, area, depth and size of liquid water ponds, and the presence of surface scattering layers. The focus of this research is to address the impact of surface scattering layers on the partitioning of incident solar radiation at the atmosphere-sea ice-ocean interface.

### **OBJECTIVES**

The objective of this work is to develop a conceptual model of how surface scattering layers on melting first-year sea ice govern the partitioning of incident shortwave radiation. This includes improving the physics employed in models that relate the physical and optical properties of sea ice.

To achieve this objective, we are conducting model simulations and field observations of surface scattering. Observations focus on (i) how surface scattering layers evolve, and (ii) how the physical properties of these layers are related to their inherent optical properties (IOPs). Modeling efforts focus on diagnosing relationships between the structural and optical properties of these layers which are typically drained and have low density and coarse grains. Results will be used to improve parameterizations of the surface energy and mass balances of sea ice during summer and will treat both bare and ponded ice.

### **APPROACH**

Our approach to this effort during Year 1 has involved two activities: (i) implementation of a structural-optical model (*Light et al.*, 2003a; *Light et al.*, in preparation) along with a two-dimensional

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimaintaining the data needed, and completing and reviewing the including suggestions for reducing this burden, to Washington VA 22202-4302. Respondents should be aware that notwithstar does not display a currently valid OMB control number.	collection of information. Send comments the Headquarters Services, Directorate for Information.	regarding this burden estimate of mation Operations and Reports	or any other aspect of the 1215 Jefferson Davis	nis collection of information, Highway, Suite 1204, Arlington	
1. REPORT DATE			3. DATES COVERED		
30 SEP 2003	2. REPORT TYPE		00-00-2003	3 to 00-00-2003	
4. TITLE AND SUBTITLE			5a. CONTRACT NUMBER		
Observing and Modeling the Surface Scattering Layer of First-Year Arctic Sea Ice			5b. GRANT NUMBER		
Arcue sea ree			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
		,	5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Applied Physics Laboratory,, University of  Washington,, Seattle,, WA, 98105			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/M NUMBER(S)	ONITOR'S REPORT	
12. DISTRIBUTION/AVAILABILITY STATEMEN Approved for public release; distri					
13. SUPPLEMENTARY NOTES					
The long-term goal of this work is solar radiation by sea ice. The part atmosphere, absorbed by the ice, a annual cycle of ice thickness, mech quantitative properties of light fiel known to depend strongly on the p cover, area, depth and size of liqui of this research is to address the in radiation at the atmosphere-sea ice	titioning of shortwave raind transmitted to the or anical and biological pr ds available to under-ico physical properties of the d water ponds, and the p apact of surface scatteri	diation into com cean is central to operties of the ice e biological comm e ice cover includ oresence of surfac	ponents back icealbedo fee e, and the quantities. This ing ice conce ce scattering	sscattered to the dback, the mean alitative and s partitioning is ntration, snow layers. The focus	
15. SUBJECT TERMS				T	
16. SECURITY CLASSIFICATION OF:		17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	

c. THIS PAGE

unclassified

Same as

Report (SAR)

7

b. ABSTRACT

unclassified

a. REPORT

unclassified

Monte Carlo radiative transfer model (2DMCRT) (*Light et al.*, 2003b) to simulate existing spectral albedo data acquired in the presence of surface scattering layers, and (ii) design of a simple device that enables the collection of optical property data on surface scattering layers sampled directly from melting sea ice covers.

A framework for the modeling component is illustrated in Figure 1. Direct observations of physical properties, including temperature (T), salinity (S), ice density ( $\rho$ ), microstructure (e.g., effective grain sizes for snow grains or melting ice crystals, size and number distributions of gas and brine inclusions), along with information about any light absorbing impurities included within the ice (e.g., dust, soot, suspended particulate material) are input to a structural-optical model. The structural-optical model uses these physical property data to predict IOPs for the ice cover. The principal IOPs are spectral absorption coefficient ( $\kappa_{\lambda}$ ), scattering coefficient, ( $\sigma$ ), and scattering phase function ( $p[\theta]$ ). Structural-optical models are still nascent and the parameterizations on which they rely are still being developed and tested (e.g., *Light et al.*, in preparation).

Boundary conditions for the radiative transfer problem (e.g., domain geometry and characteristics of the incident light field) are then used, along with calculated IOPs, as input to a radiative transfer model for the calculation of apparent optical properties (AOPs) which include spectral albedo ( $\alpha_{\lambda}$ ), spectral transmittance ( $T_{\lambda}$ ), and spectral radiance and irradiance distributions (e.g.,  $F_{\lambda}[z]$ ). The latter quantities depend on depth z in the ice.

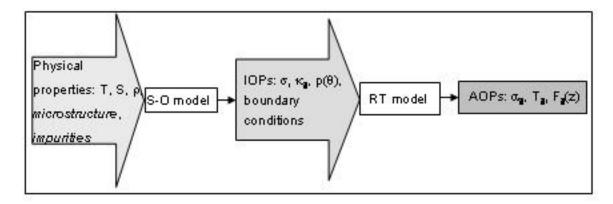


Figure 1. Schematic illustrating how structural-optical models use physical properties to predict inherent optical properties (IOPs), and then how radiative transfer models use these IOPs, along with boundary conditions to predict apparent optical properties (AOPs).

Our approach to modeling observed  $\alpha_{\lambda}$  data is based on this framework, with two significant additions. We use the comparison of predicted and observed AOPs to modify estimates of the details of the ice microstructure that can only be crudely estimated from direct measurements, and we use this comparison to improve the parameterizations employed by the structural-optical model. Results from this work are discussed below.

The key to developing our existing structural-optical model was the acquisition of simultaneously obtained structural and optical data (*Light*, 2000), and we think this is the best approach for studying the surface scattering layer. In previous studies, core samples were shipped from the field to a laboratory cold room. However, the surface layers of melting ice become porous and fragile over time, and it is therefore not practical to expect to transport or store samples from the uppermost portions of

melting sea ice. To alleviate this problem, we are constructing an 'optical core jacket' that will enable us to sample the scattering properties of the surface layers on location. This jacket consists of a specialized core barrel coupled with optical sensors for measuring the amount of light transmitted through a core sample. Our approach to the design of this device includes performing radiative transfer model simulations of the ice types we anticipate sampling in order to specify the material and functional properties of the device. After construction and testing are complete, experiments using the jacket will be conducted on sea ice at Pt. Barrow, Alaska. Analysis of the resulting data will provide a basis for improving the structural-optical model, and applying the results to a variety of sea ice models.

Measurements made with the core jacket will use a bootstrap approach. Once a core is sampled from the ice, it will be placed within the jacket barrel. Coupled optical detectors will be used to measure  $T_{\lambda}$  for ambient diffuse incident radiation through the core. The top section of the segmented barrel will be removed (approximately 1-2 cm), the ice carefully sawed off, and another  $T_{\lambda}$  measurement made. This procedure of removing segments of the ice core and making sequential  $T_{\lambda}$  measurements will produce a data set detailing the vertical structure of optical properties within the surface scattering layers and throughout the core. The optical measurements will be conducted in concert with detailed physical property assessments of the various layers.

### WORK COMPLETED

During Year 1 of this project we have (i) conducted modeling studies of existing  $\alpha_{\lambda}$  data for ice with documented surface scattering layers, (ii) performed comprehensive model simulations of the optical core jacket, and (iii) designed the core jacket in preparation for its construction.

### **RESULTS**

## Modeling $\alpha_{\lambda}$ data

To better understand the physical and optical characteristics of surface scattering layers, we modeled  $\alpha_{\lambda}$  data collected at the surface during routine measurements made by the ice physics program (see *Perovich et al.*, 2002) at Ice Station SHEBA in the central Beaufort Sea. The analysis for multiyear ice was performed on data recorded at seven different locations on seven different days during the course of the summer melt season (Figure 2). The documented physical property characterizations were input to the structural-optical model, including the presence, layer thickness, and grain size of any snow at the surface, and crude estimates of melting ice grain size as a function of depth within the ice. Predicted IOPs were then input to the 2DMCRT model to solve the radiative transfer equation for a plane-parallel geometry with the observed ice thickness and incident light conditions. In each case, the comparison between observed and predicted  $\alpha_{\lambda}$  was used to adjust the vertical profile of ice grain size within the surface layers. This adjustment of grain size is necessary because we do not have measurements of the statistics of the randomly shaped, distinctly non-spherical melting grains that comprise real sea ice, and even with such statistics, models for translating them into equivalent optical spherical grain sizes for use by the radiative transfer model are still under development.

Figure 2 shows that once the grain size profiles are adjusted, predicted  $\alpha_{\lambda}$  values agree very closely with the observations. This is not surprising, given that the model is used to adjust the grain size profiles. Furthermore, our calculations indicate that the details of the vertical structure of the surface scattering layers have strong impact on  $\alpha_{\lambda}$ . It is can also be seen that  $\alpha_{\lambda}$  for the melting multiyear ice remains relatively constant over the course of the summer (with peak  $\alpha_{\lambda}$  values between 0.74 and

0.88), despite an average total surface ablation of 60 - 70 cm. This, along with direct observations of the ice appearance, suggests the general persistence of surface scattering layers on summer sea ice, a property that will be a focal point of our investigation.

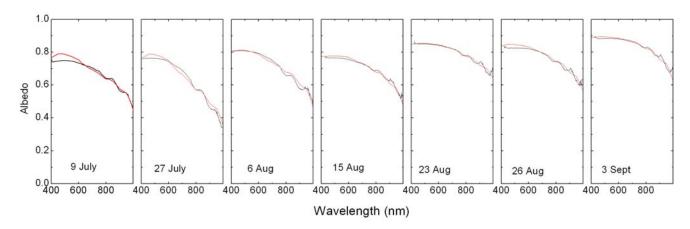


Figure 2. Observed and modeled spectral albedo for seven days during the SHEBA melt season.

Figure 3 shows vertical scattering coefficient profiles used for each of the seven cases shown in Fig. 2. To model each of these cases, four or five vertically stacked layers were used; each with uniform IOPs. To compare  $\sigma$  values associated with scatterers with different phase functions, each value of  $\sigma$  was adjusted to correspond to an asymmetry parameter of g = 0.94 via a similarity argument. Similarity arguments permit the comparison of inherent optical properties by adjusting the relative values of asymmetry parameter and scattering coefficient to represent the total attenuation due to scattering (*van de Hulst*, 1980; *Light et al.*, 2003b).

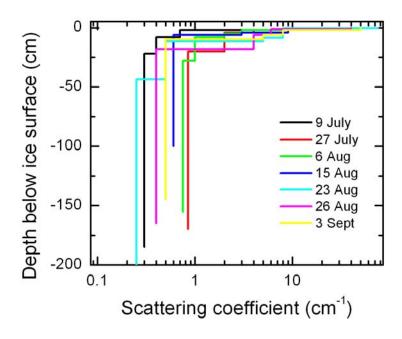


Figure 3. Plot of representative scattering coefficients as a function of depth in the ice for the seven cases shown in Fig. 2.

There is considerable variability in the  $\sigma$  values at all depths. For any one day, however, values show approximately two orders of magnitude variation over the uppermost 30 -50 cm. Because of these extremely large variations in scattering, this model analysis suggests that the surface scattering layers likely play a significant role in determining spectral albedo, absorption, and transmittance of bare, melting sea ice. This calculation provides a benchmark for predicting the optical properties of bare ice that will be studied during the field experiment. These determinations were made from multiyear ice and the focus of the field study will be on first-year ice, and the extent to which these determinations are unique and similar will be studied.

## Optical core jacket

The 2DMCRT model has been used extensively to aid in the design of the core jacket. By establishing benchmark cases from the analysis presented in Figs. 2 and 3, it is possible to simulate radiative transfer in cores with optical properties similar to those we expect to study. The primary objective of the jacket design is to maximize the discrimination of IOPs through the length of a core sample, and from one core sample to the next.

Some of the basic questions that have been addressed include: (i) over what range of scattering coefficients should we anticipate making measurements? (ii) what barrel dimensions and segmentation lengths should be designed? (iii) what barrel interior optical properties will yield the most useful measurements? should the lining be highly reflecting or largely absorbing? diffuse or specular? (iv) what is the optimal geometry and position for the optical detectors?

To illustrate this design process, we summarize the tests addressing question (iii): the sensitivity of the inferred IOPs to small changes in the optical properties of the jacket lining. To carry out this test, we modeled the transport of a diffuse radiation field incident on the top surface of a core sample with spatially uniform scattering coefficient and phase function. The core sample was modeled with 0.1 cm clearance (air gap) between its circumference and the jacket lining. We tested our ability to discriminate small changes in IOP values depending on whether the jacket lining had a reflectivity of approximately 1 or approximately 0. The results indicate that for a given measured transmittance, the uncertainty in inferred scattering coefficient is much smaller when the reflectivity of the wall lining is  $0.05 \pm 0.05$ , than when it is  $0.95 \pm 0.05$ . This result indicates that we will more accurately identify appropriate values of  $\sigma$  if the device has absorbing interior walls, relative to one with highly reflecting walls. As a result of this calculation, our device design provides for a core barrel with black interior. As a result of additional calculations, the core barrel will be designed with a 10 cm interior radius (to accommodate standard 9 cm radius cores with an air gap), and segment lengths will vary from 1-2 cm for the surface layers to 15 cm for the interior portions of the core.

## IMPACT/APPLICATIONS

A conceptual framework for describing structural-optical relationships in melting first-year sea ice will be developed based on the integrated optical and structural data sets. This framework will serve as a tool for predicting how the partitioning of shortwave radiation responds to physical changes in the surface layers of a melting ice cover. This is particularly important in modeling surface melt rates, the mean annual cycle of ice thickness, ice mechanical properties, solar heating of the upper ocean, and biological processes within the summer Arctic ice cover.

By direct observation of the physical processes that relate the ice structure to its optical properties, our understanding of the complex interactions between shortwave radiation and a melting ice cover can progress from qualitative to quantitative. First-year ice now dominates the coastal margins of the Arctic, and it may potentially cover much of the basin in a warmer Arctic, where its survival through the summer melt season will likely be tightly tied to the formation and persistence of surface scattering layers. Improved understanding of these fundamental physical processes will enable us to better understand the seasonality of a warmer Arctic, support improved operational models of the Arctic ice cover, enhance our ability to remotely monitor the state of the ice cover, and advance our capability to predict the partitioning of shortwave radiation by sea ice. The implications of these results for prediction and feedback processes will be explored in collaboration with Moritz and C. M. Bitz's ongoing studies utilizing a single column model of the ocean-ice-atmosphere system.

## **TRANSITIONS**

We anticipate that results of this study will be incorporated into a revised parameterization of sea ice thermodynamics and this parameterization will then be incorporated into climate models (such as the Community Climate System Model, CCSM) and operational models (such as PIPS).

## **RELATED PROJECTS**

An ongoing related project is "Studies of Arctic Climate Feedbacks Using SHEBA data and the NCAR Climate System Model" (NSF OPP-0084287), wherein Moritz and Bitz are using the Single Column Model version of CCSM to simulate the SHEBA year and to improve parameterizations within the CCSM.

### **REFERENCES**

- Light, B., Structural-optical relationships in first-year sea ice, Ph.D. thesis, Univ. Wash., Seattle, 2000.
- Light, B., G. A. Maykut, and T. C. Grenfell, Effects of temperature on the microstructure of first-year Arctic sea ice, *J. Geophys. Res.*, 108(C2), 3051, doi:10.1029/2001JC000887, 2003a.
- Light, B., G.A. Maykut, and T.C. Grenfell, A two-dimensional Monte Carlo model of radiative transfer in sea ice, *J. Geophys. Res.*, 108(C7), 3219, doi:10.1029/2002JC001513, 2003b.
- Perovich, D.K., T.C. Grenfell, B. Light, and P.V. Hobbs, Seasonal evolution of the albedo of multiyear Arctic sea ice, J. Geophys. Res., 107(C10), 8044, doi:10.1029/2000JC000438, 2002.
- van de Hulst, H. C., *Multiple Light Scattering Tables, Formulas, and Applications*, Vols. 1 and 2, 739 pp., Academic, New York, 1980.

### **PUBLICATIONS**

- Light, B., G. A. Maykut, and T. C. Grenfell, Effects of temperature on the microstructure of first-year Arctic sea ice, *J. Geophys. Res.*, 108(C2), 3051, doi: 10.1029/2001JC000887, 2003.
- Light, B., G.A. Maykut, and T.C. Grenfell, A two-dimensional Monte Carlo model of radiative transfer in sea ice, *J. Geophys. Res.*, 108(C7), 3219, doi: 10.1029/2002JC001513, 2003.
- Perovich, D. K., T. C. Grenfell, J. A. Richter-Menge, B. Light, W. B. Tucker III, and H. Eicken, Thin and thinner: Sea ice mass balance measurements during SHEBA, *J. Geophys. Res.*, 108(C3), 8050, doi: 10.1029/2001JC001079, 2003.